
ATS1201EMBC

Board Only 8-32 Zone DGP 3A PSU EN50131 Grade 3 Class II

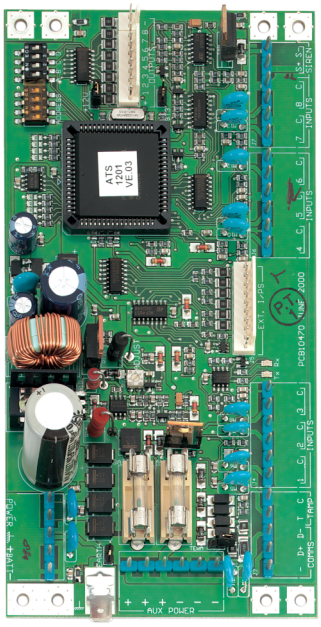

Detaljer

- Replacement board for ATS1201E, ATS1203E and ATS1204E

ATS1201EMBC

Board Only 8-32 Zone DGP 3A PSU EN50131 Grade 3 Class II

Tekniska specifikationer

General

Accessory group	Advisor Advanced, ATS Master
Type	Spare part

Electrical

Power supply type	12 VDC
Power supply value	13.8 VDC /2.9 A max
Current consumption	75 mA typical

Physical

Physical dimensions	175 x 92 x 62

Environmental

Operating temperature	−10 to +55°C (certified +5 to 40°C)
Relative humidity	95% (non-condensing)

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57