# 9-30437

## Ziton Addressable Panel Interface Card (APIC)

### Direct addressing

The ZP-LSI-1 is an interface which can be attached directly onto the main control board of any LaserSense aspirating detector. The card plugs into the main control board inside the detector enclosure. The board enables the detector to be directly addressed and communicate with the ZP3 main control panel.

### Plug in terminals

Detectors are wired onto the loop using plug in terminals located on the LaserSense detector main control board. The detector and interface are easily addressed by switch settings prominently positioned on the card.

### Advanced alarm indication

The interface is recognised by the main control panel as device type HSSD and dependant upon the analogue signals received and control panel software installed, will provide the following alarm conditions – Fault, Alert, Pre-alarm, Fire.  (Alert not displayed on ZP3 panel)

For ZP control panels operating on software prior to version 3.07 confirmation of available signals should be obtained from Ziton sales department.

Up to 127 sensing devices can be connected to each of the control panel loops.

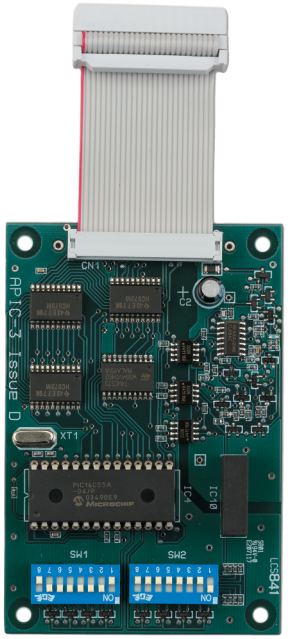


### Details

- Simple LaserSense addressing onto ZP loop
- Ribbon cable connection – no hard wiring
- Piggy backs onto detector main board
- Ease of address setting

# 9-30437
## Ziton Addressable Panel Interface Card (APIC)

## Technical specifications

### General

| | |
|---|---|
| Compatibility | ZP3 control panels |

### Detection

| | |
|---|---|
| Detection principle | LaserSense addressable interface card (APIC) |

### Physical

| | |
|---|---|
| Physical dimensions | PCB 100 x 70 (H x W) |
| Net weight | 50 g |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +60ºC |
| Relative humidity | 0 to 90% noncondensing |
| Environment | Indoor |

### Regulatory

| | |
|---|---|
| Certification | EN54-20 |

### Model No

| | |
|---|---|
| | ZP-LSI-1 |

### Mounting

| | |
|---|---|
| | Ribbon cable with plug and socket - fixes to allotted space on panel main board. (by 3 M4 x 18 mm stand off spacers) |

### Publication No

| | |
|---|---|
| | PS1839 |

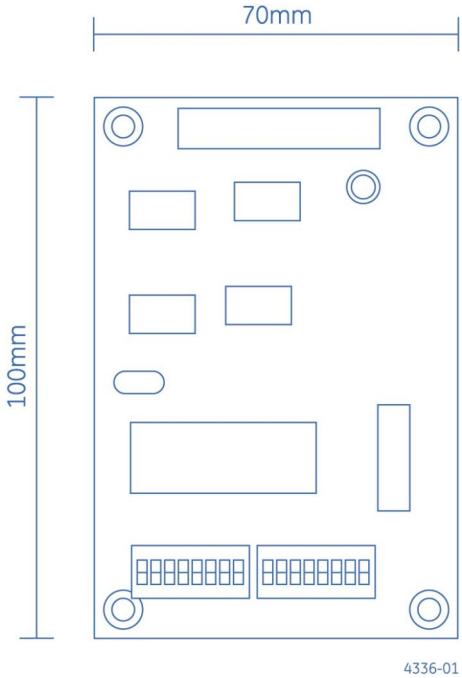


AirSENSE®

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 28 July 2025 - 15:18