
# 2010-2-PIB

**Addressable Fire Panel Accessory - Peripherals Interface Board**

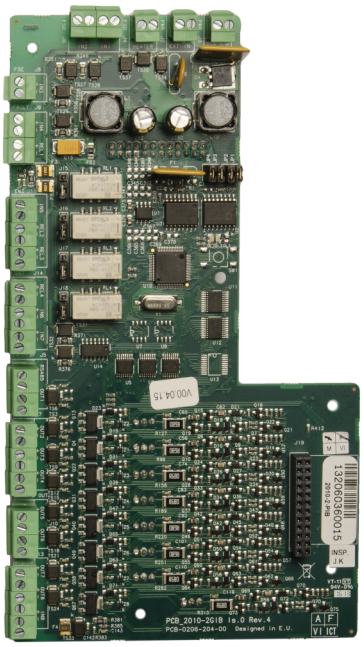

# 2010-2-PIB

## Addressable Fire Panel Accessory - Peripherals Interface Board

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | 1 to 32, more than 160K, up to 120K, up to 128, up to 160K, up to 20K, up to 256, up to 4096, up to 512, up to 60K, up to 64, up to 96 |
| Network size (nodes) | 1 to 32, more than 128, up to 128, up to 64 |

### Electrical

| | |
|---|---|
| Power supply type | VDC |

### Zone

| | |
|---|---|
| Maximum zone capacity | 1 to 64, more than 1024, up to 1024, up to 256 |

### Physical

| | |
|---|---|
| Form factor | Large |
| Mounting type | In cabinet |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | CPR |

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57