
WS104W

100 m, afgeschermd, 4 aders, 4x0,22 mmq, wit.

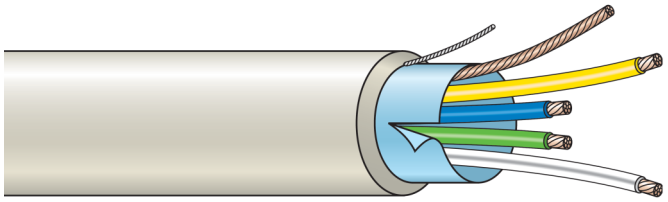

Details

- For internal or external wiring of warning network systems

WS104W

100 m, afgeschermd, 4 aders, 4x0,22 mmq, wit.

Technische specificaties

Shielding

Shielded	Yes

Core

Conductor size	0.22 mm²
Conductor material	Plain copper
Wire colours	Yellow, Green, Blue, White

Jacket

Jacket colour	White
Jacket thickness	Min. 0.45 mm² - max 0.7 mm²

Electrical Characteristics

Current rating	1A
Max.conductor DC resistance	92.4 ohm/km at +20°C
Nominal (mutual) capacitance	90 pF/m

Physical

Cable length	100 m
No. of wires	4

Environmental

Halogen free	No

Regulatory

Compliancy	CE

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57