EVERON-VE-AM-BUNDLE

Zestaw modernizacyjny ATS1700


Product overview

Everon Upgrade Kit – ATS1700-MM – ATS1125 – 5x VE1012-AM

Upgrade with confidence using the Everon Upgrade Kit, a ready-to-install package designed for a smooth and efficient transition to the Everon platform.

Unlike other kits, this enhanced kit goes further by including both a new keypad and five high-performance motion detectors, making it a comprehensive solution for a seamless transition to the Everon platform.

For even more robust and secure alarm transmission, GSM communication modules are available, providing reliable backup connectivity to keep your system online even if the primary network fails.

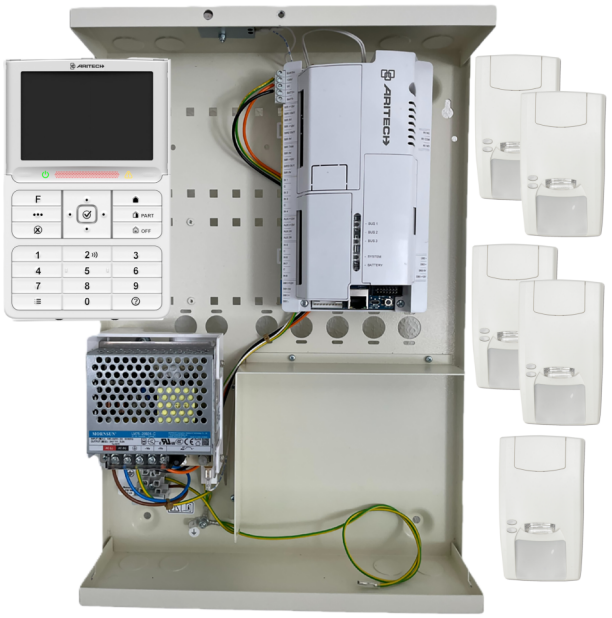

Szczegóły

- 1x Centrala Everon1700-MM
- 1x Klawiatura ATS1125
- 5x Czujki ruchu VE1012-AM

EVERON-VE-AM-BUNDLE

Zestaw modernizacyjny ATS1700

Specyfikacja techniczna

System

Product line	Everon
Product type	Integrated Access Control
Panel type	Hybrid
Kit	No
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	256
Specified cable	WCAT52 / WCAT54 lub odpowiednik

Inputs

Max no. of inputs	48
Onboard inputs	8
Inputs plug-in expansion	8
ATS1202 support	3

Outputs

No. of outputs	128
No. of onboard outputs	3 wyjścia elektroniczne + 1 przekaźnikowe

Area

No. of areas	4

User/Cards

Max. no. of users	more than 2000
Users with name	1000
Max. no. of cards	2000 do 65532
Max. no. of PIN codes	2000 do 65532

Access control

Standard doors on control panel	4
Door groups	128
Floor groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, IP
Databus type	RS485

Event log

Alarm event log	14500
Access event log	10000

Electrical

Operating voltage	24 VDC
Mainboard current consumption	110 mA przy 24 V (zasilacz), 160 mA przy 12 V (akumulator)
Max system current	950 mA przy 13,8 V ±0,2 V
Max aux power current	2500 mA przy 13,8 VDC ±0,4 V
Auto-reset fuses	3 (elektryczne, 1,3A na użycie)
Glass break fuses	1 (zasilanie sieciowe, T-2A 230 VAC, zwłoczny)

Physical

Physical dimensions	199 x 140 x 45 mm
Net weight	435 g

Environmental

Operating temperature	-10 do +55°C
Relative humidity	95% (bez kondensacji)
Environmental Class	Klasa II, do użytku wewnętrznego
IP rating	IP31

Regulatory

Compliancy	CE
Certification	CE

Supported versions

Version MR3.2 and above supports up to 48 zones; versions prior to MR3.2 supports up to 32 zones

Wyroby zgodne

Kategoria	Odniesienie	Opis
Communication Devices	ATS7341	Moduł komunikacji GSM do central Axon i Advisor Advanced
Communication Devices	ATS7341-SIM	Moduł komunikacji GSM do central Axon i Advisor Advanced, zawierający kartę SIM UltraSync
Keypad	ATS1125-B	Czarna klawiatura Everon i Axon z czytnikiem Mifare
Keypad	ATS1140	7" ekran dotykowy do systemów Everon oraz Advisor Advanced z wbudowanym czytnikiem Mifare EV1-EV3. Możliwość pracy w trybie secure mode, zgodny z Grade 3.

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57