# SMA-LP-MULTI

**MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE**



# SMA-LP-MULTI

## MA SIGMA Lite Plus - Multi, 2.8 inch QVGA touchscreen, Multi-factor Bio/Card, MIFARE/MIFARE Plus/DESFIRE, IP65, 500 users, CE

## Especificações técnicas

### System

| | |
|---|---|
| RTE (Request To Exit) | No |
| CSN (Card Serial Number) | Yes |
| Custom data model | Yes |

### Technology

| | |
|---|---|
| Reader type | BioMetric |
| Reader operating-transmitting frequency | 13.56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN), MIFARE Classic (custom data), MIFARE DESFire (CSN), MIFARE DESFire EV1 (CSN), MIFARE DESFire EV1 (custom data), Mifare DESFire EV2 (CSN), MIFARE Plus (CSN), MIFARE Plus (CSN, level 1 and 3), NFC (CSN) |
| SAM module embedded | No |

### Biometric

| | |
|---|---|
| Biometric type | Fingerprint |
| Biometric sensor type | Optical |

### Interface & connections

| | |
|---|---|
| Interface | Ethernet, OSDP V2, OSDP V2 Secure Channel, RS-485, USB, Wiegand |
| Connector type | Network, Pigtail |

### Tamper type

| | |
|---|---|
| Pry-off tamper | No |
| Opening tamper | Yes |

### Operation

| | |
|---|---|
| Stand-alone | Yes |
| PIN keypad | Yes |

### Electrical

| | |
|---|---|
| Power supply type | PoE in |

### Physical

| | |
|---|---|
| Colour | Black |
| Material | Polycarbonate |
| Form factor | Oversized |
| Mounting type | Surface mount |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Environment | Outdoor |

### Regulatory

| | |
|---|---|
| Compliancy | CE, FCC, ICASA, REACH, RoHS, UL 294, WEEE |

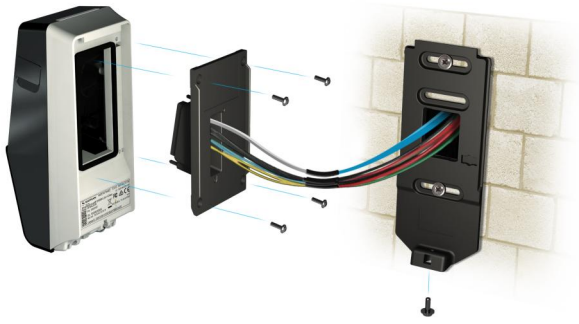

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57