
# TP-CP-ISO-25PK

## (25 PACK) TRUPORTAL CREDENTIAL - CLASSIC ISO CARDS - PROXIMITY (EM) - NO MAGSTRIPE GLOSS/GLOSS

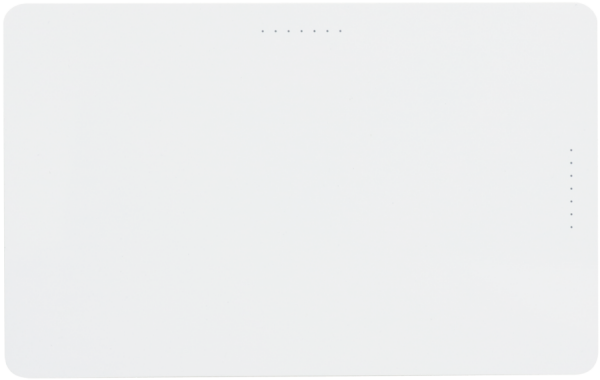

# TP-CP-ISO-25PK

## (25 PACK) TRUPORTAL CREDENTIAL - CLASSIC ISO CARDS - PROXIMITY (EM) - NO MAGSTRIPE GLOSS/GLOSS

## Technische specificaties

### System

| | |
|---|---|
| Custom data model | No |
| Card slot punch | No |

### Technology

| | |
|---|---|
| Credential type | Nahdistanz |
| Credential operating frequency | 125 KHz |
| Support technology 125 KHz | GE ProxLite/CASI Prox |

### Printing

| | |
|---|---|
| Direct surface printing | Yes |
| Thermal transfer printing | Nicht empfohlen |

### Ordering information

| | |
|---|---|
| Minimum order quantity | 1 |
| Cards/tags in package | 25 |
| Special card order form required | No |

### Physical

| | |
|---|---|
| Surface cover | Glänzend |
| Material | PVC |
| Form factor | CR80 (Kredit) |
| Physical dimensions | 55 × 85 × 20 mm |
| Net weight | 150 g |
| Shipping weight | 160 g |
| Colour | Weiß |

### Environmental

| | |
|---|---|
| Storage temperature | -10 to 45°C |

### Regulatory

| | |
|---|---|
| Compliancy | RoHS |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57