KE-DBA-RECW

Akcesoria do inteligentnych czujek serii Excellence - podstawa wpuszczana (biała)

General


The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it’s a perfect match for exceptional overall performance.

The KE-DBA-RECW is an Excellence series, recess mount base accessory. It allows Excellence series detectors to be semi- recess mounted into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

Inatallation

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is automatically clamped between a retaining flange on the underside of the base moulding.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.

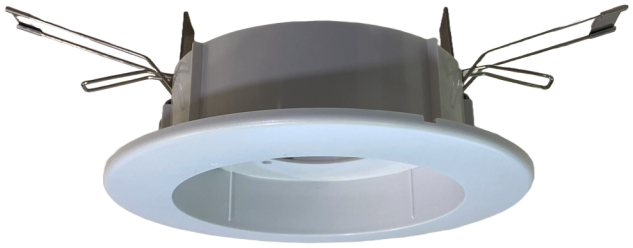

Szczegóły

- Łatwy montaż za pomocą standardowych klipsów co pozwala uniknąć wiercenia.
- Zwiększa niski profil czujki dla instalacji wrażliwych na estetykę
- Obsługuje standardowe gniazda serii Excellence bez utraty funkcji
- Zintegrowana listwa wykończeniowa zakrywa nierówne boki otworu
- Podwójna lokalizacja znaczników adresu pozwala uniknąć pozycjonowania podstawy, aby znaczniki były widoczne

KE-DBA-RECW

Akcesoria do inteligentnych czujek serii Excellence - podstawa wpuszczana (biała)

Specyfikacja techniczna

General

Compatibility	Gniazda serii Excellence

Physical

Physical dimensions	138 x 38 mm (Ø x W)
Net weight	110 g
Colour	Weiß (RAL 9016)
Mounting type	Deckenmontage, Versenkte Montage
Cable entries	1
Material (body)	Geformtes ABS

Environmental

Vandal proof	No
Operating temperature	-10 do 75°C
Relative humidity	0 do 95% bez kondensacji
Environment	Drinnen
IP rating	IP42

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CE
Environmental	EN60529

Wyroby zgodne

Kategoria	Odniesienie	Opis
Detection device	KE-DB3010W	Akcesoria do inteligentnych czujek serii Excellence - gniazdo standardowe
Detection device	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57