KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish



KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish

Technische Spezifikationen

General

Maximum system capacity (device count)	up to 32000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Small
Colour	Pure white (RAL 9010)
Mounting type	Surface mount

Environmental


Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Kompatible Produkte

Kategorie	Referenz	Beschreibung
Batteries	BS127N	Battery, 12 V, 7.2 Ah (nur für Brandmeldetechnik! Für alle anderen Gewerke nutzen Sie bitte BS127N-A)
Panel	2010-2-NB	FireNet Netzwerkkarte - RS485 für Netzwerkzentralenring
Panel	2010-2-PAK-NET128	Freischaltung für Netzwerk ermöglicht bis zu 128 Ringe.
Panel	2010-2-PAK-RMMB	Freischaltung des MOBbus (Client/Server-Architektur)
Panel	2010-2-PAK-RMOH	Aktivierung des Contact ID über das Ethernet-Port
Panel	2010-2-PAK-RMSDK	Aktivierung des SDK über das Ehternet-Port

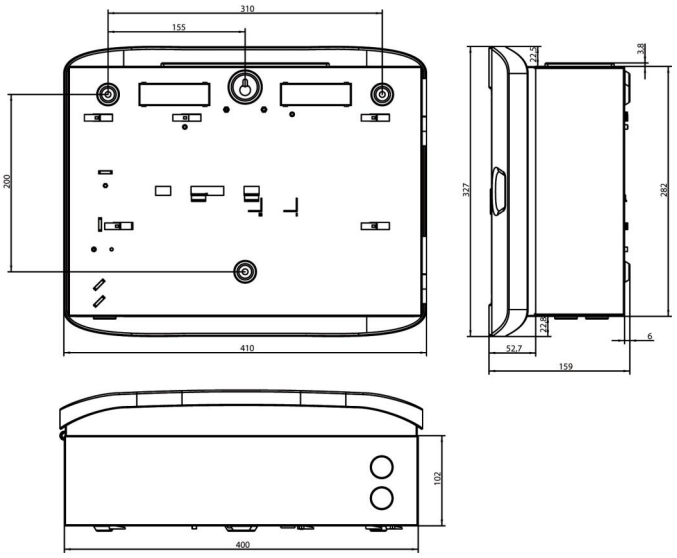

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.