
# WC112W

**100 m, 12 aders, 2x0,75 + 10x0,22 mm, wit.**

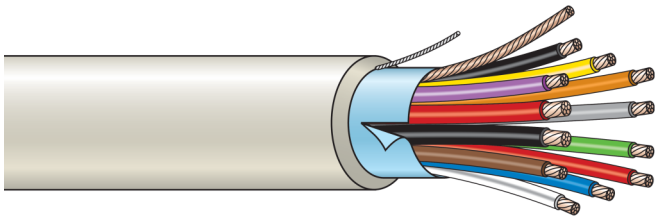

# WC112W

## 100 m, 12 aders, 2x0,75 + 10x0,22 mm, wit.

## Technische specificaties

### Shielding

| | |
|---|---|
| Shielded | Yes |

### Core

| | |
|---|---|
| Conductor size | 0.22 mm² (data) - 0.75 mm² (power) |
| Conductor material | Plain copper |
| Wire colours | Red, Black (power)<br>Blue, White, Yellow, Green, Grey, Brown, Red, Orange, Black, Violet (data) |

### Jacket

| | |
|---|---|
| Jacket colour | Hvid |
| Jacket thickness | Min. 0.45 mm2 - max 0.7 mm2 |

### Electrical Characteristics

| | |
|---|---|
| Current rating | 1 A |
| Max.conductor DC resistance | 92.4 ohm/km at +20°C |
| Nominal (mutual) capacitance | 90 pF/m |

### Physical

| | |
|---|---|
| Cable length | 100 m |
| No. of wires | 12 |

### Environmental

| | |
|---|---|
| Halogen free | Yes |

### Regulatory

| | |
|---|---|
| Compliancy | CE |

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57