KFP-AF1-FB2-36

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French



KFP-AF1-FB2-36

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French

Spécifications techniques

General

Maximum system capacity (device count)	jusqu'à 16000
Network size (nodes)	Jusqu'à 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	Jusqu'à 512

Physical

Form factor	Groß
Colour	Blanc pur (RAL 9010)
Mounting type	Montage en surface

Environmental

Environment	Drinnen

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

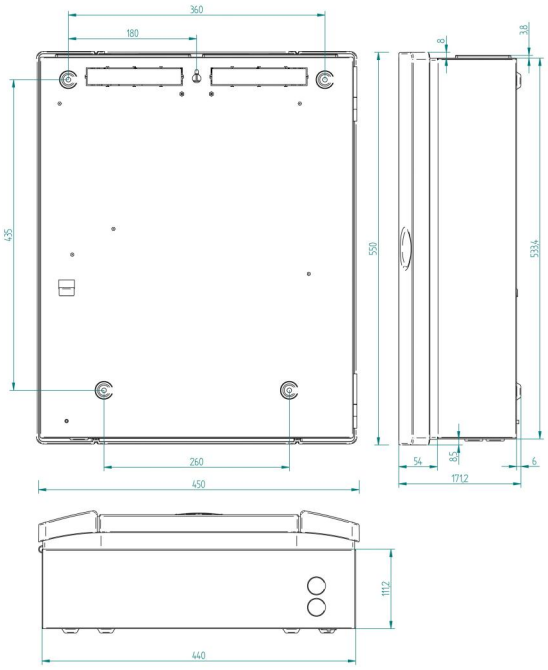

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57