TVGP-M01-0201-PTZ-G

Caméra IP PTZ compacte TruVision 2 Mpx, H.265+, IR 50 m, zoom x10, PoE+/12 VDC, alimentation incluse, IP66.

Présentation

La caméra TVGP-M01-0201-PTZ-G est une caméra IP compacte Pan Tilt Zoom destinée à être utilisée dans des installations intérieures et extérieures. La résolution de 2 mégapixels de la caméra, associée à d'excellentes capacités de faible luminosité, vous permet de capturer le niveau de détail requis à tout moment.

La caméra est entièrement programmable, avec jusqu'à 300 préréglages et 8 tours de patrouille et de préréglage.

La fonction de masque de confidentialité à 8 zones permet à ces caméras de bloquer les zones sensibles. En outre, la variété des fonctions d'intelligence et d'analyse ajoute une valeur substantielle et des performances améliorées à tout système vidéo.

Intelligence vidéo

La caméra est dotée de diverses fonctions vidéo intelligentes intégrées, comme la détection de franchissement de ligne, la détection de zone d'intrusion, la détection d'entrée/sortie de région, etc. Certaines de ces fonctions intelligentes peuvent être affinées en ajoutant la classification des personnes et des véhicules pour filtrer les événements indésirables, ce qui permet une gestion plus efficace des événements d'alarme et du stockage.

Technologie

La caméra est dotée de la compression H.265+ afin d'optimiser ses besoins en bande passante et en stockage. Parallèlement, la norme H.264, qui est également prise en charge, permet à la caméra d'être connectée aux installations existantes si nécessaire.
Les jeux de commandes ONVIF, PSIA et CGI garantissent que cette caméra peut également être facilement connectée à pratiquement tous les systèmes de vidéosurveillance.



Détails

- Résolution 2 Mpx
- Zoom optique x10, zoom numérique x16
- Éclairage IR jusqu'à 50 m
- Intelligence vidéo avec options de classification des personnes et des véhicules
- Microphone et haut-parleur intégrés, alarmes audio prises en charge
- LED d'alarme blanche clignotante
- Compression H.265+
- Montage direct au plafond uniquement

TVGP-M01-0201-PTZ-G

Caméra IP PTZ compacte TruVision 2 Mpx, H.265+, IR 50 m, zoom x10, PoE+/12 VDC, alimentation incluse, IP66.

Spécifications techniques

General

Technology	IP
Video standard	NTSC, PAL
OSD	Text Overlay
Privacy masking	24 programmable polygon privacy masks, mask color or mosaic configurable
Software compatibility	TruVision Navigator, TVRmobile, Web Browser

Camera

Sensor size	1/1.8"
Max. resolution	2 MP
Sensor scan	Progressive
Sensor type	CMOS
Digital S/N ratio	≥ 55 dB
Shutter time	1/1 to 1/30,000 s

Lighting performance

WDR type	True WDR
WDR	120 dB
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	Color: 0.005 Lux @ (F1.3, AGC ON), B/W: 0.001 Lux @ (F1.3, AGC ON), 0 Lux with IR
Infrared (IR)	Yes
IR range	50 m
IR wavelength	850nm

Encoding

Video streams	3
Main stream compression	H.264, H.264+, H.265, H.265+
Sub stream compression	H.264, H.265, MJPEG
Third stream compression	H.264, H.265, MJPEG
Video bit rate	32 to 16 Mbps
Main stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p)
Sub stream resolutions	352 x 288 (CIF), 640 x 480 (VGA), 704 x 576 (4CIF)
Third stream resolutions	1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 352 x 288 (CIF), 640 x 480 (VGA), 704 x 576 (4CIF)
Max. resolution @ fps	1920 × 1080 @ 25 fps

Lens

Focal length	2.8 to 28 mm - Horizontal FoV 108 to 19.8°, vertical FoV 56.4 to 11.5°
f-stop	Max. F1.3
Auto iris	Yes
Auto focus	Yes
Motorized zoom	Yes

Pan/tilt/zoom

Pan	Pan speed: configurable from 0.1 to 60°/s; preset speed: 60°/s
Tilt	Tilt speed: configurable from 0.1 to 50°/s, preset speed 50°/s
Endless pan	No, pan range 355°
Auto flip	No
Optical zoom	10x
Digital zoom	16x
Preset positions	300
Preset tours	8

Network

Network interface	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	CGI, ISAPI, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T, SDK
Supported network protocols	802.1x, Bonjour, DDNS, DHCP, DNS, ezDDNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, RTCP, RTP, RTSP, SNMP, TCP/IP, UPnP

Audio

Audio compression	G.711, G.722.1, G.726, MP2L2, PCM
Audio in	1 built-in microphone
Audio out	1 built-in speaker, pre-defined and custom audio alarms supported
Audio bit rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32-192 Kbps (MP2L2)

Alarm I/O

Alarm inputs	1
Alarm outputs	1 relay output, 12 VDC power output of max. 0.7 W, flashing white alarm LED, audio alarms
Alarm I/O connection	Individual wires

Storage

Local storage type	Built-in memory card slot, support microSD/SDHC/SDXC card
Max. SD card capacity	256 GB

TVGP-M01-0201-PTZ-G

Caméra IP PTZ compacte TruVision 2 Mpx, H.265+, IR 50 m, zoom x10, PoE+/12 VDC, alimentation incluse, IP66.

Video intelligence

Alarm trigger	HDD error, HDD full, Invalid login, IP address conflict, Network disconnected
ROI	8 fixed regions for each stream
Smart event	Audio exception detection, Face capture, Intrusion detection, Line crossing detection, Motion detection, Object removal detection, Region entrance detection, Region exiting detection, Unattended baggage detection
Intelligence options	Capture de visage: Peut détecter jusqu'à 30 visages simultanément. Il prend en charge la détection, la capture, le classement et la sélection des visages en mouvement, et génère la meilleure image de visage. Filtrage des personnes/véhicules: Ces options peuvent être configurées sur le franchissement de ligne, la détection d'intrusion, la détection d'entrée et de sortie de zone.

Electrical

Operating voltage	12 VDC, PoE (802.3at) 12VDC adapter included (without mains lead)
Power consumption	Max. 24 W

Physical

Physical dimensions	Ø 156.4 × 142.1 mm Ø 6.16 × 5.59 in.
Net weight	Approx. 1.90 kg Approx. 4.19 lb.
Colour	Grey (Pantone 428c)
Material	Metal
Form Factor	PTZ
Mount	Ceiling mount

Environmental

Operating temperature	-30 to 65 °C -22 to 149 °F
Relative humidity	<90% noncondensing
IP rating	IP66

Regulatory


Compliancy	CE, EMC, FCC, RCM, REACH, RoHS 3, UKCA, UL, WEEE

Généralités

Prise en charge des navigateurs web sans plugin	Google Chrome, Mozilla Firefox

Réseau

Vue en direct simultanée	Jusqu'à 20 canaux

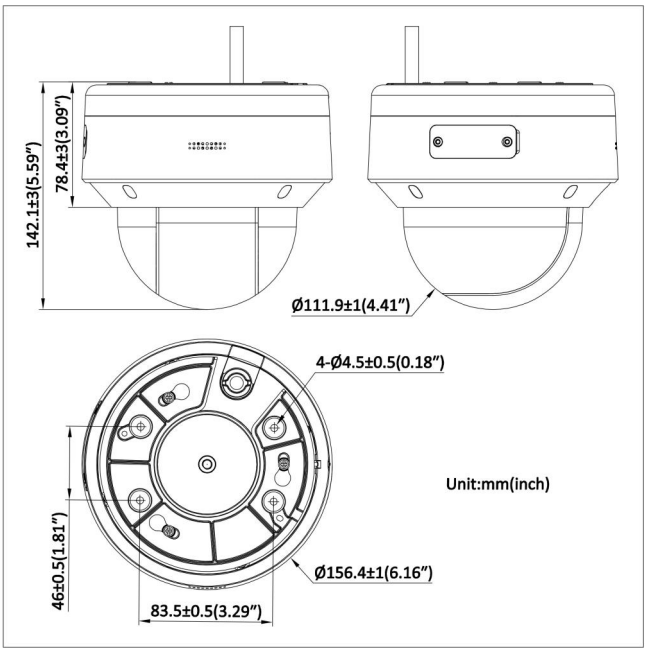

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57