NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports



NS2052-8P-2C

8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports

Technische Spezifikationen

General

Fast ring	Nein
DHCP snooping	No
Fault relay output	Nein

Category

Category	Industriale
Management	Unverwalteter
Managed	Nein
PoE	Yes

Physical ports

No. of ports	8
Port type	Schnell
Speed	Schnell
Fiber port	2 SFP
Supported SFPs	S30/S35 Serie

Switch Performance

Mac table	16 K
Jumbo frame support	10 K

Electrical

Redundant power	Yes
Power supply type	52 bis 56 VDC

Physical


Colour	Schwarz
Material	Metall
Mounting type	DIN-Hutschiene, Wandmontage
Stackable	No

Environmental

Environment	Drinnen

Regulatory

IEC standard	IEC60068-2-27 (Schlag), IEC60068-2-32 (freier Fall), IEC60068-2-6 (Erschütterung)

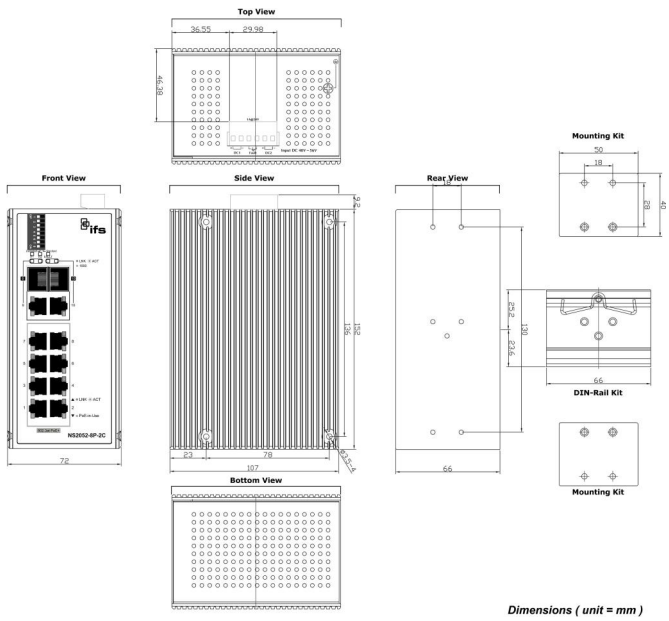

Dimensions (unit = mm)

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.