KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian



KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian

Tekniske specifikationer

General

Maximum system capacity (device count)	up to 16000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Stor
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

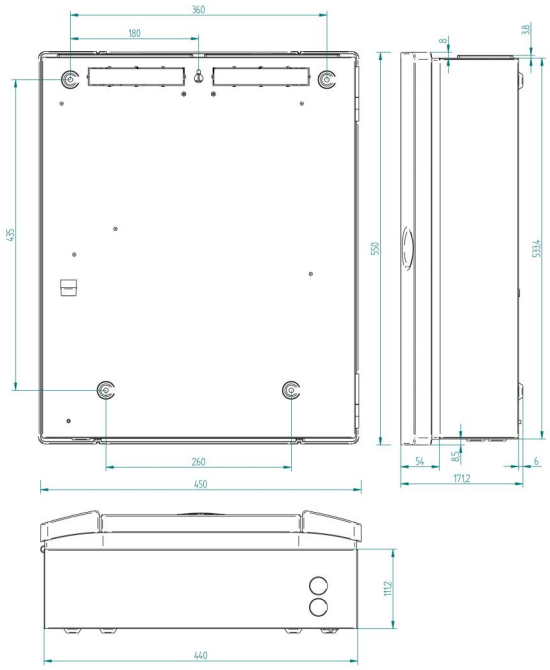

KIDDE COMMERCIAL

Kidde Global Solutions er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 12 November 2026 - 18:57