KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish



KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish

Tekniske specifikationer

General

Maximum system capacity (device count)	up to 32000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Lille
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Kompatible produkter

Kategori	Reference	Beskrivelse
Batteries	BS127N	Akkumulator, blygel, 12 V, 7,2 Ah. (Kun til BRAND, brug BS127N-A til alle andre løsninger)
Panel	2010-2-NB	Netværkskort til 2X serien
Panel	2010-2-PAK-NET128	Nøgle til øget netværkskapacitet op til 32 node og 128 sløjfer
Panel	2010-2-PAK-RMMB	Nøgle til aktivering af funktion i 2X panel. Contact ModBus over TCP/IP til fjernovervågning fra FW r3.5.
Panel	2010-2-PAK-RMOH	2010-2 PAK Enables the Contact ID protocol over Ethernet
Panel	2010-2-PAK-RMSDK	Nøgle til aktivering af funktion i 2X panel. SDK protokol over TCP/IP

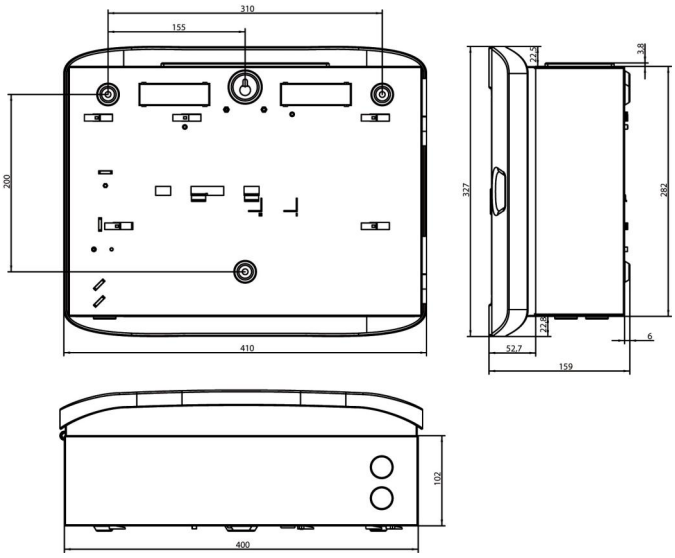

Kidde Global Solutions er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 12 November 2026 - 18:57