KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian



KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian

Spécifications techniques

General

Maximum system capacity (device count)	bis zu 16000
Network size (nodes)	bis zu 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	bis zu 512

Physical


Form factor	Groß
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Drinnen

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

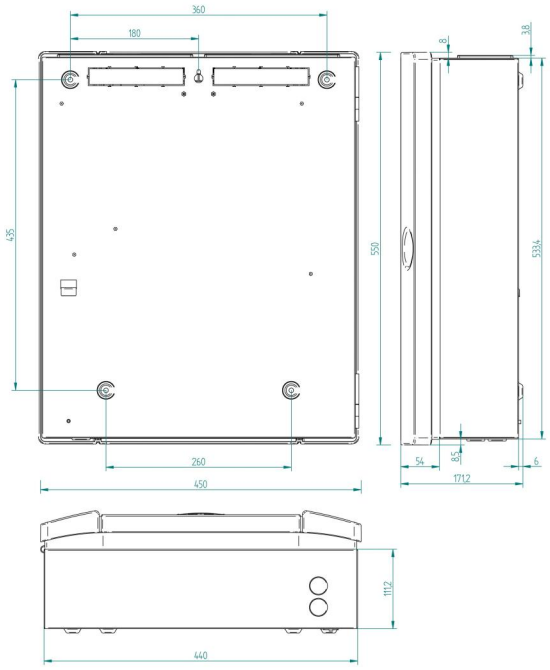

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57