# KFP-AF1-FB2-36

**Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French**



# KFP-AF1-FB2-36

## Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | hasta 16000 |
| Network size (nodes) | hasta 64 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 1 |

### Zone

| | |
|---|---|
| Maximum zone capacity | hasta 512 |

### Physical

| | |
|---|---|
| Form factor | Groß |
| Colour | Blanco puro (RAL 9010) |
| Mounting type | Montaje en Superficie |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-21, EN54-4, VdS |

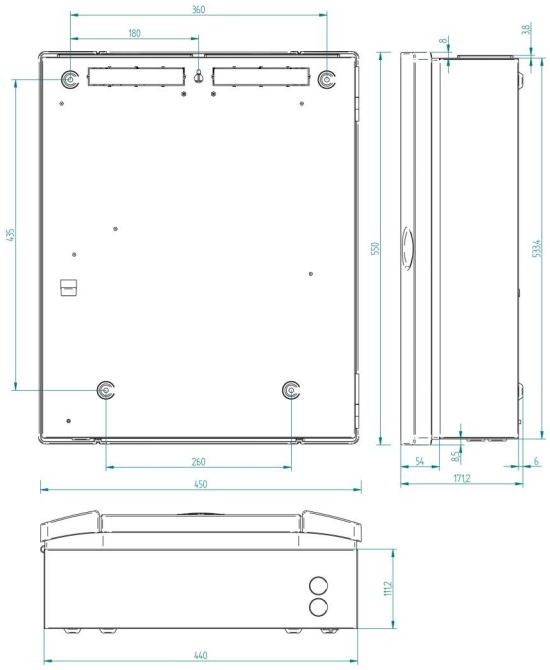


KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57