KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian



KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian

Specifiche tecniche

General

Maximum system capacity (device count)	jusqu'à 16000
Network size (nodes)	jusqu'à 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	jusqu'à 512

Physical


Form factor	Stor
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

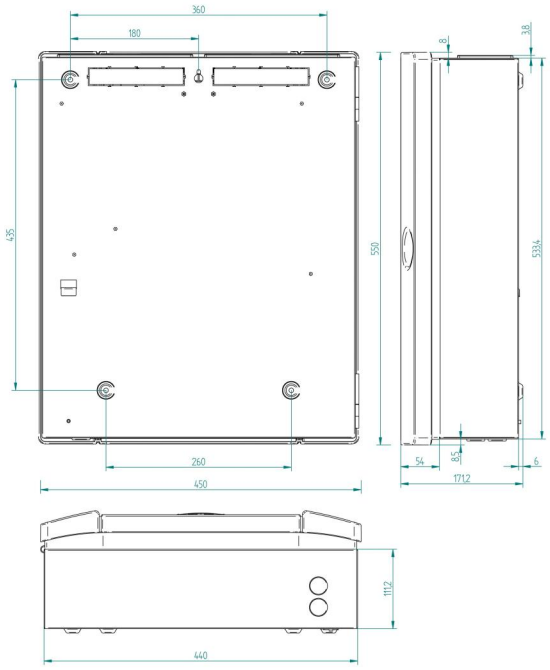

KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57