KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian



KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian

Specyfikacja techniczna

General

Maximum system capacity (device count)	up to 16000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	up to 512

Physical


Form factor	Large
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

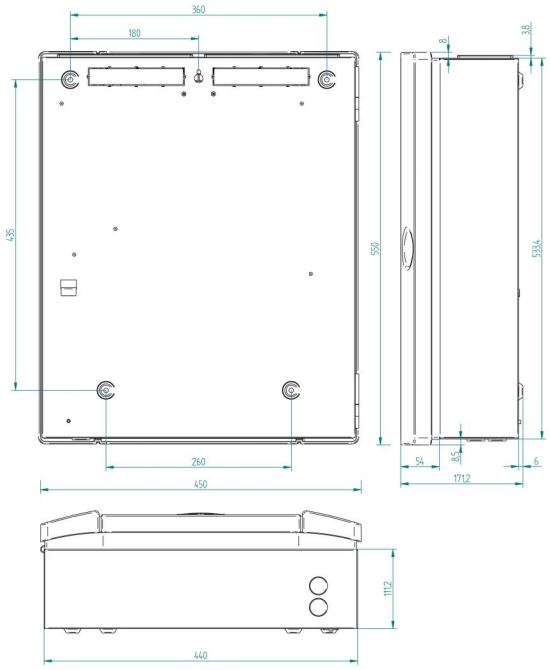

KIDDE COMMERCIAL

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57