KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish



KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish

Tekniska specifikationer

General

Maximum system capacity (device count)	up to 32000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Lille
Colour	Zuiver wit (RAL 9010)
Mounting type	Oppervlaktemontage

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Kompatibla produkter

Kategori	Referens	Beskrivning
Batteries	BS127N	Blyackumulator, 12 V, 7,2 Ah mått 151 x 94 x 65 mm (endast för 2010-1/-2 brandlarmcentraler, använd BS127N-A för alla andra tillämpningar)
Panel	2010-2-NB	Nätverkskort till 2X-serien för brandnätverk (Firenet)
Panel	2010-2-PAK-NET128	Aktiveringsnyckel för 32 centraler/128 slingor
Panel	2010-2-PAK-RMMB	Aktiveringsnyckel för MODBUS
Panel	2010-2-PAK-RMOH	2010-2 PAK Enables the Contact ID protocol over Ethernet
Panel	2010-2-PAK-RMSDK	2010-2 PAK Enables custom event reporting and command control using the Edwards

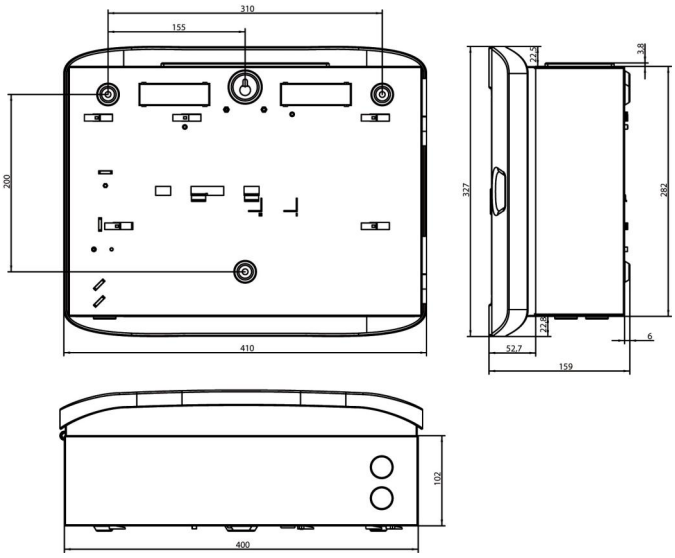

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57