
# ATS1500A-IP-MM-RK

**Kit ATS1500A-IP-MM including ATS1115A keypad**

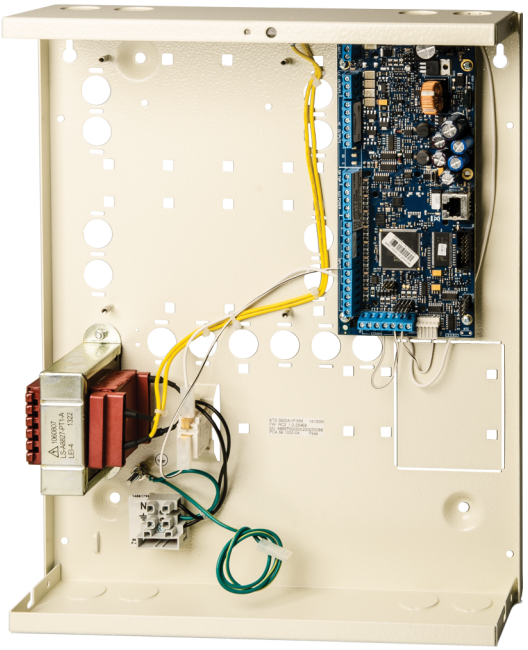

## Détails

- 8 entrées zones intégrées
- 32 zones Max. : câblés, sans fil ou mixte
- Extension d'entrée et de sortie économique
- Jusqu'à 16 entrées de capteur
- 4 Groupes
- Jusqu'à 50 utilisateurs
- Port USB pour une configuration locale
- Interface de transmission RTC en option (ATS7700)
- Multilingue : chaque utilisateur a sa propre langue
- Connexion Ethernet 10/100 intégrée
- Rapport d'alarme sur IP vers un récepteur d'alarme OH-NETREC - GPRS en option

# ATS1500A-IP-MM-RK

## Kit ATS1500A-IP-MM including ATS1115A keypad

## Spécifications techniques

### System

| | |
|---|---|
| Product line | Advisor Advanced |
| Product type | Integrierte Zugangskontrolle |
| Panel type | Hybrid |
| Kit | Yes |
| No. of keypads / readers | 8 |
| Data Gathering Panels (DGP) | 7 |
| No. of alarm groups | 16 |
| Specified cable | WCAT52 / WCAT54 |

### Inputs

| | |
|---|---|
| Max no. of inputs | 32 |
| Onboard inputs | 8 |
| Inputs plug-in expansion | 8 |

### Outputs

| | |
|---|---|
| No. of outputs | 128 |
| No. of onboard outputs | 5 |

### Area

| | |
|---|---|
| No. of areas | 4 |

### User/Cards

| | |
|---|---|
| Max. no. of users | more than 2000 |
| Max. no. of cards | 50 |
| Max. no. of PIN codes | 50 |

### Communication

| | |
|---|---|
| Onboard transmission type | IP |
| Transmission extension | GSM, GSM/GPRS, GSM/GPRS/IP, PSTN |
| Databus type | RS485 |

### Electrical

| | |
|---|---|
| Power supply type | 230 VAC |
| Power supply value | 230 VAC +10%, -15%, 50 Hz |
| Mainboard current consumption | 150 mA |
| Max system current | 950 mA at 13.8 V ±0.2 V |
| Max aux power current | 840 mA |
| Auto-reset fuses | 5 |
| Glass break fuses | 1 |

### Physical

| | |
|---|---|
| Physical dimensions | 315 × 388 × 85 mm |
| Material | Stahl (lackiert) |
| Housing | Średnia metalowa |

### Environmental

| | |
|---|---|
| Operating temperature | -10 to +55°C |
| Relative humidity | 0.95 |
| Environmental Class | Class II, indoor |
| IP rating | 30 |

### Regulatory

| | |
|---|---|
| EN50131 Grade | Klasa 3, z zestawem sabotażu |
| Compliancy | CE |

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57