AXON2600-MM

Contrôleur de porte d'accès de 2 à 6 portes, évolutif jusqu'à 102 portes avec CDC4(-EN) en mode étendu avec ATS8600.

Axon Access Door controller

Axon2600-MM is a door controller fully dedicated to access control.
Axon2600-MM is the master door controller of an access control solution from 2 up to 54 doors.
With 2 relays on board and 4 extra relays with the plugable ATS624, this door controller offers the possibility to start a scalable installation for a competitive budget.
With the 2 auxiliary supply ouputs of 12V & 1.1A, it is possible to power until 4 magnet locks without any extra power supply.
Mobil App (iOS & Android) is available for free for installer & supervisor.
This mobil app is dedicated to the access control and powerfull to the end user.
A intuitive webpage is also available for the installer and the end user.

Axon2600-MM solution


The Axon2600-MM is the centerpiece of the access control solution of Aritech.
This solution is designed to respond to the requirements of the small and medium installations.
This solution is compatible with ATS accessories and readers, such as ATS1125, ATS118x serie, ATS7341, AST1811, ATS1210, ATS1744, ATS1740, etc.

Readers & Cyber Security

Axon2600-MM is compatible with the Mifare DesFire technology.
By using the Aritech Mifare DesFire badges preconfigured with the Aritech private application, it is very easy to make an installation with an high level of cyber security.
The flexibility of the Axon2600-MM gives the possibility to use customized badges with their own private application.
The complete eco system of the Axon2600-MM has the same cyber security level than Aritech products certified NFA2P @ Cyber level 3.
It means that the Webpage (HTTPS), the mobil App, the Ultrasync communication and the bus (ATS LAN & OSDP) are compliant with the cyber requirements for a modern connected equipment.

Webserver

Axon2600-MM provides the possibility to be configured by using a secured web page.
This web page gives the possibility, without any tools, to do the full configuration of the Axon2600-MM : hardware and users.
The access at the features of the web page is depending of the profile of the user logged : installer or supervisor.
The access to the page server can be configured in HTTP or HTTPS by using your own SSL certificate that you can dowload in the door controller.
The installer can have access at this web page via the UltraSync portal.
The Webpage has an intuitive interface, who gives to the end user the

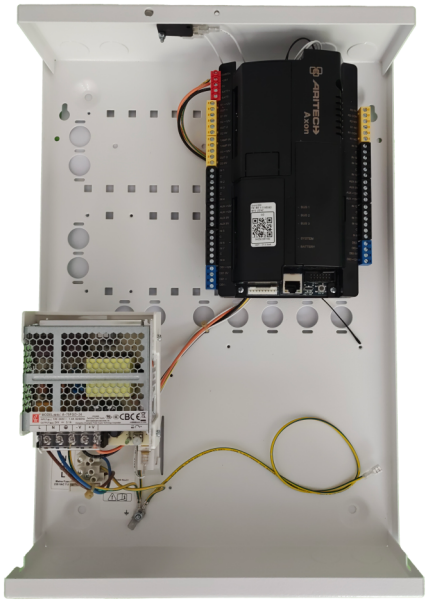

Détails

- De 2 à 6 portes : 2 intégrées + 4 avec l'ATS624
- Extensible jusqu'à 102 portes à l'aide de 12 modules CDC4 (-EN)
- Interface serveur web pour une configuration facile et une gestion des utilisateurs (utilisateur final)
- Application mobile (Advisor Advanced Pro) avec une interface utilisateur dédiée au contrôle d'accès
- Connectivité UltraSync pour un accès à distance convivial et gratuit
- 65 532 utilisateurs natifs, sans nécessité de CDC4
- Connectivité via Ethernet ou GSM 4G (ATS7341)
- 16 entrées intégrées sur le contrôleur, extensibles selon les besoins
- De 2 à 6 sorties relais extensibles, ainsi que 3 sorties de tension commutée
- 1 bus ATS LAN
- 1 bus OSDP V2 (Bus 3)
- Compatible avec les lecteurs Mifare : série ATS118x (Bus 1)
- Compatible avec les lecteurs Mifare DesFire OSDP V2 : HID, STid
- Compatible avec les serrures RF : Ulhman & Zacher (Bus 3), Aperio (avec CDC4)
- Transmission des événements système vers la station de surveillance (protocole UltraSync)
- Compatibilité ATS8600 via IP directe ou UltraSync
- Port USB pour configuration locale avec l'ATS8500
- Une batterie de 18 Ah peut être intégrée dans le boîtier pour garantir l'autonomie en cas de coupure d'alimentation

possibility to manage the users easily, group of users, doors, door groups and schedules, in complete autonomy.

Wireless equipment

Axon2600-MM is compatible with the ATS1236 and hub for wireless locks.
The Ulhman & Zacher hub is directly compatible with the OSDP bus 3 and offers the possibility to manage 6 wireless locks.
These locks can be managed from the web page and mobile application as standard doors : it means they can be opened, locked or disabled remotely.
In asscociation with the ATS1236 it is possible to obtain the position of the door with a wireless magnetic contact.
In conclusion it is possible to have a fully wireless solution without any wiring.
This solution is also available with the CDC4(-EN).

Communication

The communication of the Axon2600-MM can be done via Ethernet or 4G GSM module (ATS7341).
Establish this communication is easy, as using the UltraSync protocole (VPN).
When the Axon2600-MM is connected to UltraSync, the remote connection of the mobile app, ATS8600 & ATS8500 is possible for free.
With UltraSync protocole, the system event types of Axon2600 can be monitored by a CMS : main fault, low battery ...

Firmware update

As a modern connected equipment, the Axon2600 firmware can be upgraded by using multiple ways :
- with the ATS8500 : in direct IP connection or with UltraSync
- USB port

Flexibility

As an Aritech product the Axon2600 has the possibility to be configured to respond at different scenarios.
The triggers, filters and schedules are available to activate the outputs.

AXON2600-MM

Contrôleur de porte d'accès de 2 à 6 portes, évolutif jusqu'à 102 portes avec CDC4(-EN) en mode étendu avec ATS8600.

Spécifications techniques

System

Controller type	Kontroler drzwiowy
Maximum bus length	ATS LAN : 1500m (expandable) OSDP V2 Bus : 1500m
Max. no. of access levels	128
Max. no. of PIN code digits	4
Max. no. of holidays	365
PCB only	Yes
LCD intrusion keypad	Yes
Language installation manual	English, French

Readers/doors

Max. no. of doors	6
Max no. of readers	12

Users/cards

Max no. of cardholders	65532
Offline badge capacity	65532

Interfaces

Reader interface	OSDP V2 Sicherer Kanal
Host connection	RS485

Communication

Bus interface	RS485
IP type	IP wersja 4
IP addressing	DHCP, Stały IP
IP port speed	10 Mbit

Inputs/outputs

Max no. of inputs	16
Max no. of outputs	6 (extendable)
Output types	Przekaźniki

Support

Language installation manual	English, French

Electrical

Operating voltage	230VAC
Power supply type	12 VDC
Power supply value	2.5A total Auxiliary : 2 x 1.1A

Physical

Physical dimensions	315 x 445 x 88 mm
Net weight	4.9Kg
Colour	Weiß
Material	Metall

Environmental

Operating temperature	-10°C +55°C
Environment	EN50130-5 ; Klasa II - Wewnątrz (ogólnie)
IP rating	IP31

Regulatory

Compliancy	CE

Event log

Max no. of events	20000 for access events

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57