KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian



KFP-AF1-FB2-22

Addressable Fire Panel with Fire Brigade Controls - 1 Loop - Hungarian

Tekniska specifikationer

General

Maximum system capacity (device count)	do 16000
Network size (nodes)	do 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	1

Zone

Maximum zone capacity	do 512

Physical


Form factor	Stor
Colour	Czysta biel (RAL 9010)
Mounting type	Montaż nawierzchniowy

Environmental

Environment	Indendør

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

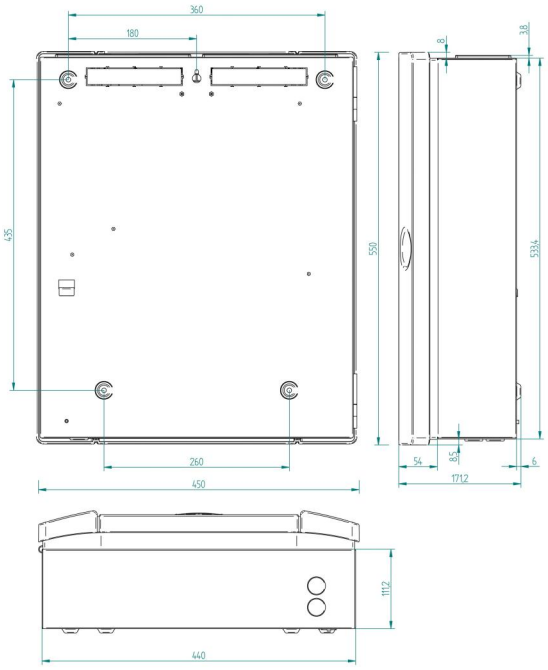

KIDDE COMMERCIAL

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57