NS3552-8P-2S-V2

8+2 Industriel Gigabit Managed PoE+ Switch

Overview

The IFS® NS3552-8P-2S-V2 is an Industrial Gigabit PoE+Managed Switch equipped with eight 10/100/1000Mbps RJ45 ports with PoE+ (30w) capabilities and two 100/1000Mbps SFP (fiber) uplink ports. These are fully managed Layer 2+ switches providing a robust industrial hardened design that provides for rapid operational recovery in the event of a network or power system failure.

Management in TruVision® Navigator

The NS3552-8P-2S-V2 simplifies management of your IP video system by providing integration into TruVision Navigator 8.0 and above.

The NS3552-8P-2S-V2 can provide information to TruVision Navigator such as ONVIF lables of cameras, bandwidth usage per port and POE power control making installation and management IP Video systems simpler and effortless.

Robust Hardened Design

With an IP-30 rated enclosure, IFS Industrial Gigabit Managed Switches provide a high level of immunity against electromagnetic (EMI) and radio-frequency (RFI) interference typically found in industrial environments. This series of switches comply with IEC60068-2-xx standards for free-fall, shock, and vibration and operate in -40° C to 75° C temperatures found in difficult environments such as plant floors or in curbside traffic control cabinets.

Industrial-grade Network Redundancy and Recovery

These switches not only incorporate the industry standard Rapid Spanning Tree Protocol (IEEE 802.1w RSTP), but also an advanced Industrial Fail-Safe (IFS) technology accommodating multiple redundant ring topologies and improved network recovery time of less than 20ms. The switches incorporate a redundant power supply system to further enhance network reliability and uptime. Ideal for use in implementing highly fault-tolerant ring and mesh network architectures, these switches are well suited for harsh environments such as industrial security, factory automation and intelligent transportation systems (ITS).



Detaljer

- 8-port 10/100/1000Base-T with PoE+
- 2-ports SFP (fiber) 100/1000Base-X
- Full support in TruVision Navigator 8 and above.
- High-performance Switch Architecture
- Up to 20Gbps non-blocking switch fabric
- 9K bytes Jumbo frame support
- 8K MAC address table, automatic source address learning and ageing
- IGMP (v1/v2/V3) Snooping, up to 255 multicast Groups with IGMP Querier mode support, and MLD (v1/v2) Snooping, up to 255 multicast Groups with MLD Querier mode support
- VLAN Support - up to 255 VLANs groups out of 4094 VLAN IDs, MVR (Multicast VLAN Registration), Voice VLAN, MAC-Based VLAN, Protocol-Based VLAN
- Quality of Service (QoS), 802.1p priority, 802.1Q VLAN tag, DSCP/TOS field in IP Packet
- IEEE 802.3ad LACP / Static Trunk, Supports 5 groups of 8-Port trunk support
- Advanced Security
- MAC Filtering and Source IP/MAC address port-binding
- Complies with IEEE 802.3af / IEEE 802.3at Power over Ethernet / End-Span PSE and up to 8 IEEE 802.3af / 802.3at devices powered
- Circuit protection prevent power interference between ports
- Robust Hardened Design
- IP30 metal enclosure, DIN Rail and Wall Mount Design
- Wide operating temperature range of -40ºC ~ +75ºC

NS3552-8P-2S-V2

8+2 Industriel Gigabit Managed PoE+ Switch

Tekniske specifikationer

General

Fast ring	Ja (ERPS)
Storm control	Broadcast, Multicast, Unicast
Security	802.1x, ACL, RADIUS, Quelle MAC- / IP-Adressbindung, TACACS+
DHCP snooping	Yes
Fault relay output	Ja, mit 2x digitalen Eingängen und 2x digitalen Ausgängen

Category

Category	Industriell
Management	Verwaltet
Managed	Ja
PoE	Yes

Physical ports

No. of ports	8
Port type	Gig
Speed	Gigabit
PoE/PoE+	8 port PoE/8 port PoE+
Fiber port	2
Supported SFPs	S20/S25 Serie, S30/S35 Serie
SFP speed	100/1000

Switch Performance

Switch fabric	20 Gbps
Throughput (Mpps)	14.88
Mac table	8 K
Jumbo frame support	9 K

Layer 2 Functions

Management interface	Console, Web, Telnet, SNMP 1,2,3, SSH/SSL secure access
IGMP snooping	255 Gruppe, Snooping v1, v2, v3
IGMP query	Ja
VLAN, QoS	256, Ja
Access control list	123 entries

Electrical

PoE power budget	260 W
Redundant power	Yes
Power supply type	12 bis 48 VDC
Power consumption	320 W

Physical

Physical dimensions	152 x 107 x 72 mm
Net weight	1.684 kg
Colour	Schwarz
Material	Metall
Mounting type	DIN-Hutschiene, Wandmontage
Stackable	No

Environmental


Operating temperature	-40 to +75°C
Storage temperature	-40 to -85 °C
Relative humidity	0 to 95% (non-condensing)
Environment	Drinnen
IP rating	IP30

Regulatory

IEC standard	IEC60068-2-27 (Schlag), IEC60068-2-32 (freier Fall), IEC60068-2-6 (Erschütterung)

Kompatible produkter

Kategori	Reference	Beskrivelse
Power Supplies	PS48VDC480W-DIN	Strømforsyning DIN skinne montering, 48VDC 480W

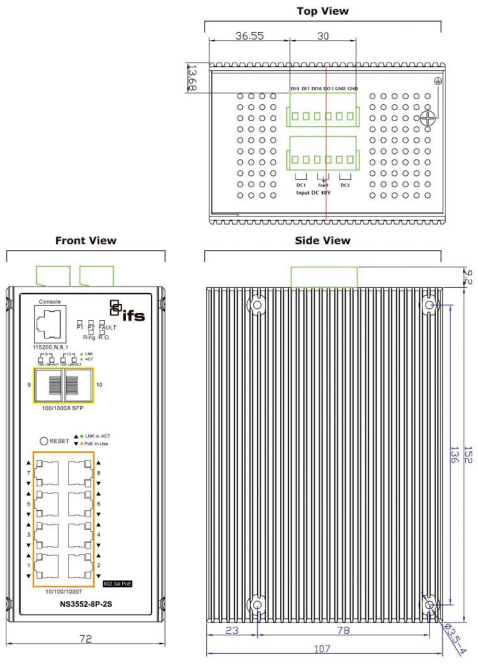

Kidde Global Solutions er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 12 November 2026 - 20:20