# KFP-AF1-FB2-36

**Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French**



# KFP-AF1-FB2-36

## Addressable Fire Panel with Fire Brigade Controls - 1 Loop - French

## Especificaciones técnicas

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 16000 |
| Network size (nodes) | bis zu 64 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 1 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 512 |

### Physical


| | |
|---|---|
| Form factor | Groß |
| Colour | Ren vit (RAL 9010) |
| Mounting type | Ytmontering |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-21, EN54-4, VdS |

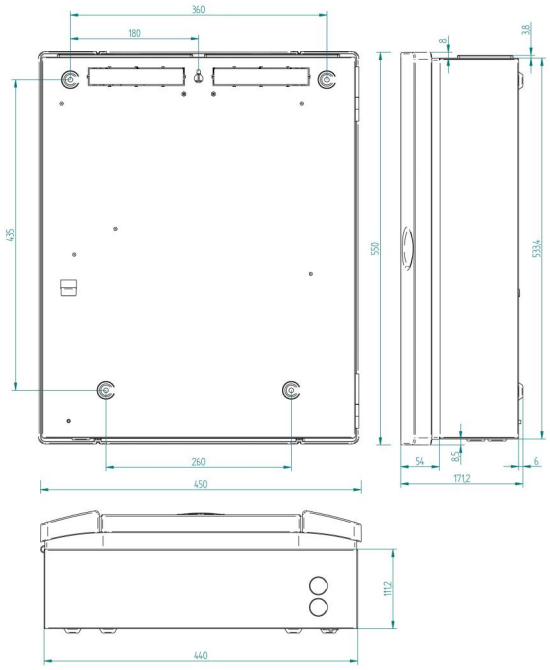


KIDDE COMMERCIAL

Como empresa innovadora, Kidde Global Solutions se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 12 November 2026 - 18:57