KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish



KFP-AF2-S-09

Addressable Fire Panel - 2 Loop small cabinet - Spanish

Specyfikacja techniczna

General

Maximum system capacity (device count)	up to 32000
Network size (nodes)	up to 64

Electrical

Power supply type	VAC

Loop

Maximum loop capacity	2

Zone

Maximum zone capacity	up to 512

Physical

Form factor	Small
Colour	Ren vit (RAL 9010)
Mounting type	Ytmontering

Environmental

Environment	Indoor

Regulatory

Compliancy	BS5839-1, CPD, LPCB, NBNS21-100, NEN2535, RoHS, WEEE
Certification	EN54-13, EN54-2, EN54-21, EN54-4, VdS

Wyroby zgodne

Kategoria	Odniesienie	Opis
Batteries	BS127N	Battery, 12 V, 7.2 Ah (for 2010-1 & 2010-2 fire panels only, use BS127N-A for all other applications)
Panel	2010-2-NB	Karta sieciowa RS485 do central 2X, 2 porty RS485 -topologia ring, do 16 central/32 pętli w sieci
Panel	2010-2-PAK-NET128	Klucz aktywacyjny-rozszerzenie sieci do 32 węzłów / 128 pętli
Panel	2010-2-PAK-RMMB	Klucz aktywacyjny-MODBUS over IP
Panel	2010-2-PAK-RMOH	Klucz aktywacyjny- Contact ID over IP
Panel	2010-2-PAK-RMSDK	2010-2 PAK Enables custom event reporting and command control using the Edwards

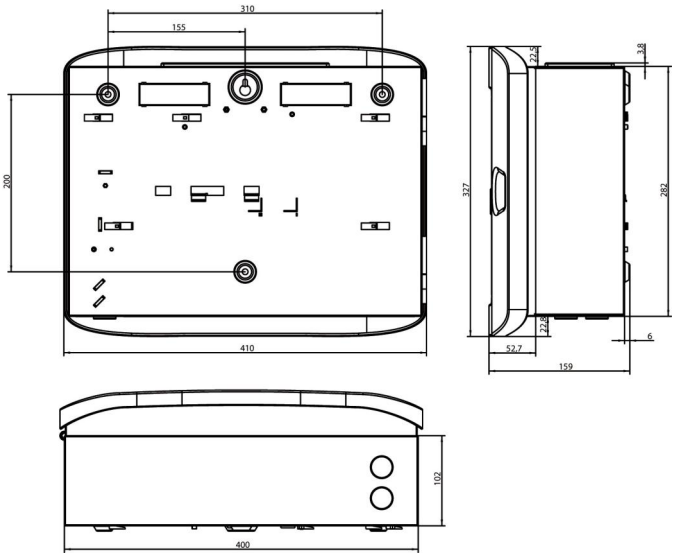

Będąc firmą innowacyjną, Kidde Global Solutions zastrzega sobie prawo do zmian w specyfikacji wyrobów bez uprzedzenia. W celu uzyskania najnowszych specyfikacji prosimy o wizytę na stronach pl/firesecurityproducts.com lub kontakt z przedstawicielem handlowym.

Last updated on 12 November 2026 - 18:57