NC-D-PT


Conventional hand held device programmer

General

The P-9910B is the tool for programming and configuration of GST addressable and conventional detectors and devices. It can be used to read parameters and set the operating mode and sensitivities of these devices.

Functions

- Configure conventional point detector sensitivity levels
- Configure conventional point detector status LED powered indications
- Configure conventional beam detector sensitivity levels
- Configure conventional beam detector beam range

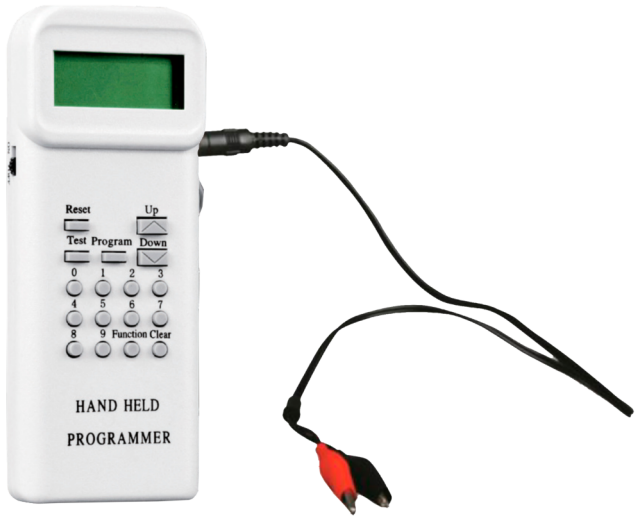

Details

- Hand held & portable
- Easy operation
- 4-digit alphanumeric LCD display
- Low-consumption, hibernation and power saving functions extends the operating time
- Battery low indication

NC-D-PT

Conventional hand held device programmer

Technical specifications

General

Status indication	LCD display
User interface	LCD display
Compatibility	NC-Series point & beam detectors
Connectivity	I2C & fly leads with clips

Electrical

Batteries	1 x 9 V (Laminated)
Current consumption	≤100 µA (Standby) ≤8 mA (Operating)
No. of cable cores	2
Terminals	1
Auto power off	100 s

Physical

Physical dimensions	64 × 164 × 24 mm (w x h x d)
Net weight	150 g
Colour	Grau
Material (body)	ABS

Environmental


Vandal proof	No
Operating temperature	-10 to +65°C
Storage temperature	-30 to +75°C
Relative humidity	10 to 95%, Non-condensing
Environment	Drinnen

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CE

Compatible products

Category	Reference	Description
Detection device	NC-DBO	Conventional reflective beam detector
Detection device	NC-DPH-W	Conventional heat detector (white)
Detection device	NC-DPM-B	Conventional multisensor fire detector (Black)
Detection device	NC-DPM-W	Conventional multisensor fire detector (White)
Detection device	NC-DPO-W	Conventional optical smoke detector (White)

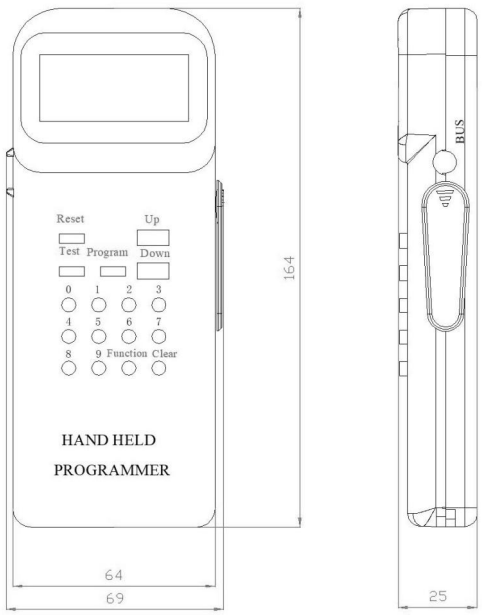

KIDDE COMMERCIAL

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 24 April 2026 - 16:51